


E2000 Connector

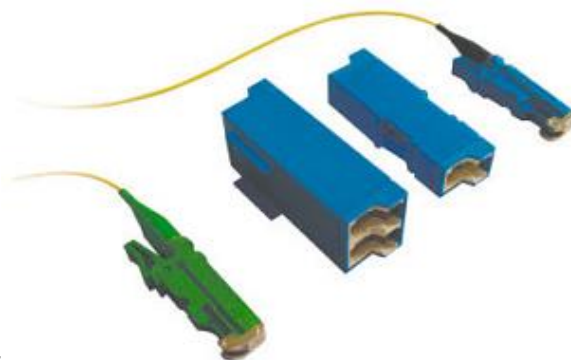

Features:

- According standard: IEC61547-15、EN186270
- Dustproof, Anti-light leakage
- Standard plastic body, good interchangeabil
- Push-Pull mechanism for quick connection a
- Ceramic ferrule, PC、UPC&APC polishing
- Cable O.D. : $\phi 0.9$ 、 $\phi 2.0$ 、 $\phi 3.0$

Applications:

- Data and Communication system
- Optical access networks(OAN)
- Fiber to the home(FTTH), Fiber to the desk(FTTD)
- Integrated photoelectricity system

Specifications:

Parameter	SM			MM
	PC	UPC	APC	PC
Return loss(dB)	≥ 45	≥ 50	≥ 60	≥ 35
Insertion loss(dB)	≤ 0.3			
Repeatability(dB)	≤ 0.1			
Durability(Matings)	≥ 500			
Temp. Cycless ($^{\circ}\text{C}$)	$-25 \sim +70$			
Tensile Strength(N)	≥ 90 ($\phi 3.0$), ≥ 70 ($\phi 2.0$), exclusive $\phi 0.9$			

Boundary Dimension:

